

电动推杆单产品规格书

1. 工作环境 Working Environment

- 1.1: 额定电压 Rated Voltage : 110V/120V 60Hz 220V/230V 50Hz
- 1.2: 工作环境 Working Environment : 0°C to +40°C
- 1.3: 储藏环境 Stored Environment : -10°C to +80°C

2. 电机性能 Motor Function

- 2.1: 供电电源 Voltage : 110V/120V 60Hz & 220V/230V 50Hz
- 2.2: 电机转速 Motor Speed : $1450 \pm 10\%$ rpm (50Hz) / $1700 \pm 10\%$ rpm (60Hz)
- 2.3: 空载电流 Unload Current : ≤ 0.8 Amp (50Hz) / ≤ 1.0 Amp (60Hz)
- 2.4: 电机噪音 Motor Noise : ≤ 68 dB (the distance 300MM from the output shaft of the motor 300mm, Environment Noise ≤ 42 dB, Radial test.)
- 2.5: 温控保护 Temperature control protection : 125 度
- 2.6: 受力方向 Forced Direction : 推力和拉力 PULL AND PUSH

3. 产品性能 Products Function


- 3.1: 空载特性 Unload Function
- 3.1.3 额定电压 Rated Voltage : AC110V/120V AC220V/230V
- 3.1.4 空载速度 Unload Speed : 4.0 ± 0.5 m (50Hz) $\sim 6.3 \pm 0.5$ mm (60Hz)
- 3.1.5 空载电流 Unload Current : ≤ 0.8 Amp (50Hz) / ≤ 1.0 Amp (60Hz)
- 3.2: 负载特性 Load
- 3.2.1 额定电压 Rated Voltage : AC110V/120V AC220V/230V
- 3.2.2 负载能力 Load Capacity : 3500N Max. (PUSH/PULL)
- 3.2.3 负载电流 Load Current : ≤ 1.0 Amp (50Hz) / ≤ 1.4 Amp (60Hz)
- 3.2.4 工作频率 Working Frequency : 10% (On 2 Minutes Max.)
- 3.3: 其它特性 Other Specifications
- 3.3.1 讯号输出 Signal Output : POT sensor (Optional)
- 3.3.2 防护等级 IP Class : IP66
- 3.3.3 开关 Switch : 内置凸轮调节行程开关 there is a cam inside to adjust the stroke switch
- 3.3.4 固定方式 Fixed form : 配置 2 个外管固定座 there are two outer tube Fixed Seat
- 3.3.5 安规认证 Certificates : UL+CUL+CE

- 3.3.6 启动电容capacitor starter

:内置方型启动电容（CBB61-P2） there is a Square Capacitor starter
- 3.3.7 产品耐压Pressurization

:1800VAC/1mA/3s

4. 负载曲线图 Load Curve Graph

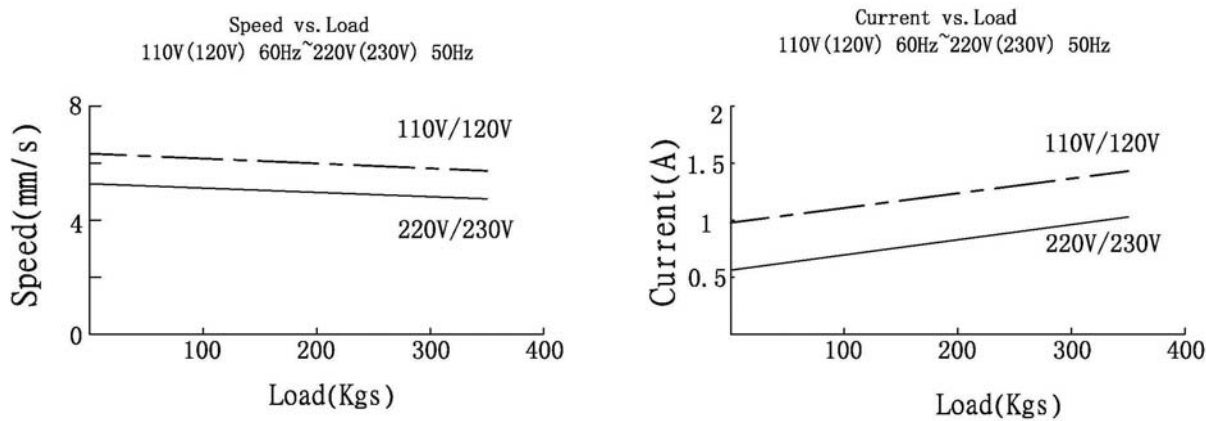


5. 行程和安装尺寸对照表 Stroke &Retracted Length


Stroke&Retracted Length


Stroke Length(mm)	305 (12")	457 (18")	610 (24")	914 (36")	1219 (48")
Retracted Length(mm)	500	650	800	1110	1410
POT sensor (RED&YELLOW) (K Ω)	0.65±0.05~3.50±0.2	0.65±0.05~5.00±0.3	0.65±0.05~6.40±0.4	0.65±0.05~9.30±0.5	0.65±0.05~9.50±0.5

6. 产品照片 Products Pictures

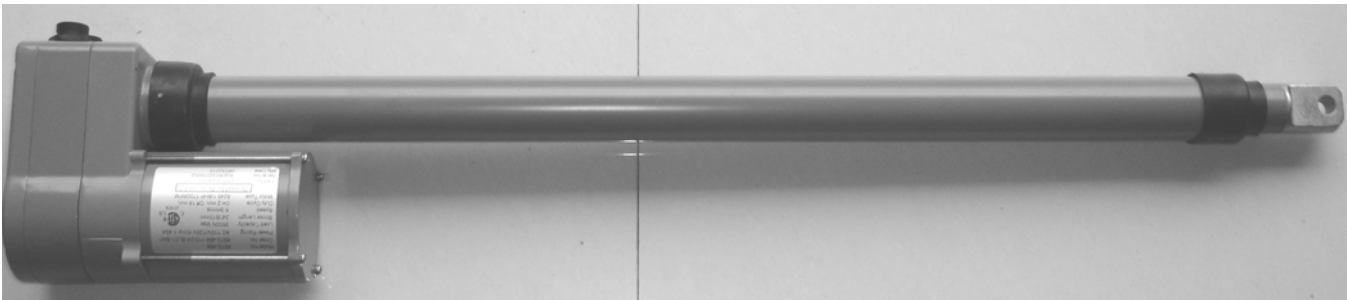

7. 产品图面 Products Drawing

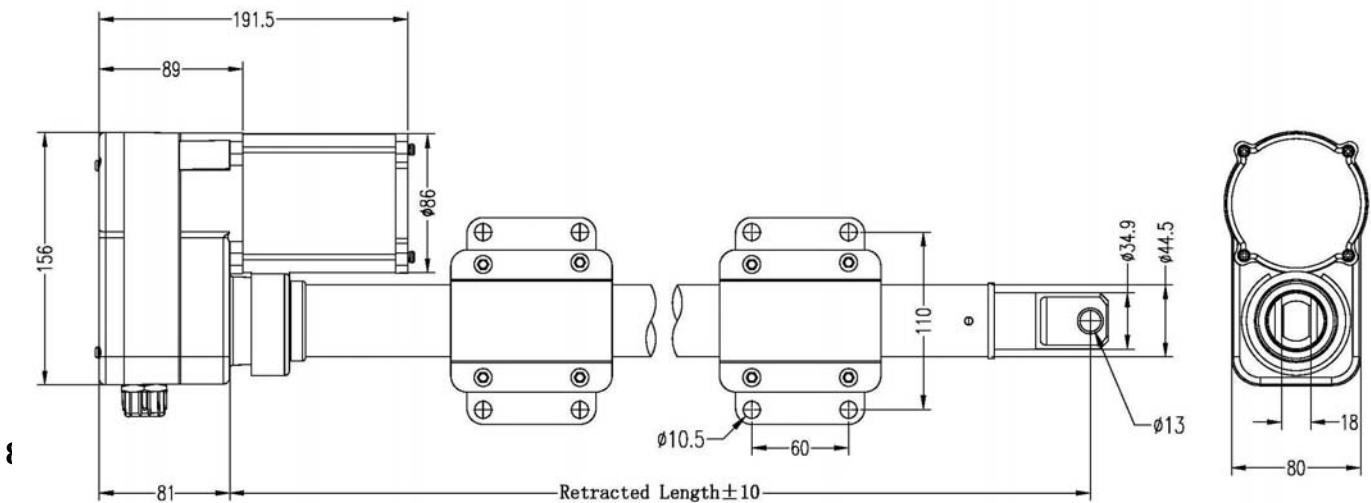

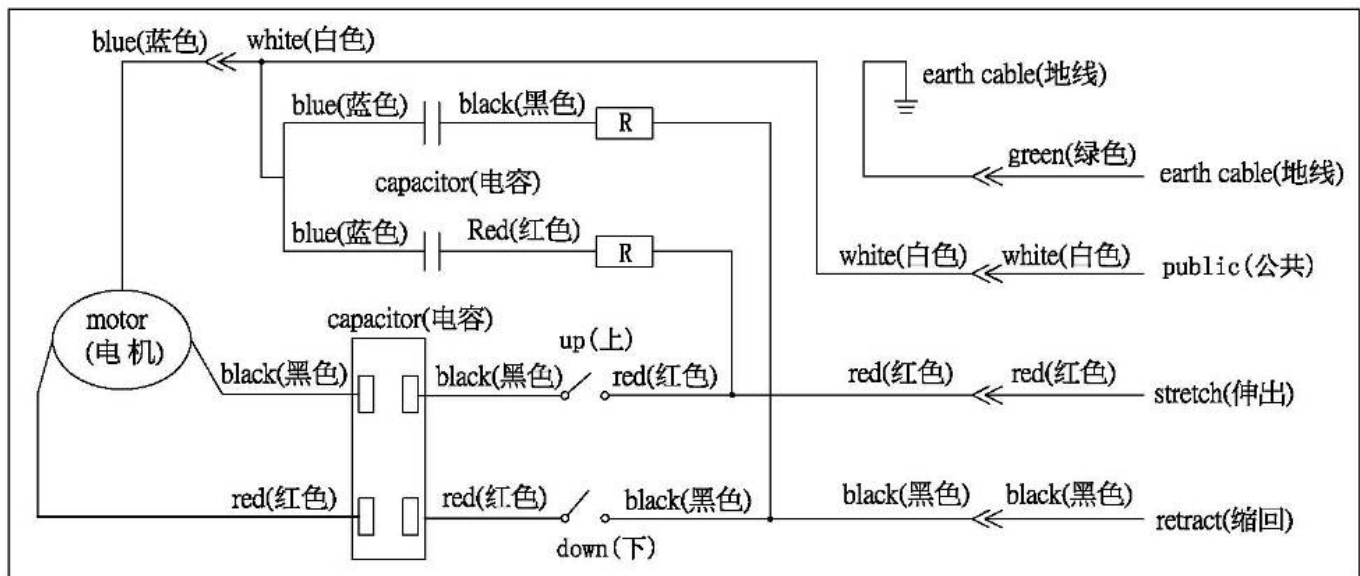

9. 客户选型 Customer Choice for the Length

6570机种选型

6570 - XXX - XXX - XX - X - XX - XX - X

6570型号 Model:6570 (HAA4)

456:8245定子,6牙螺杆 456:8245 rotor/6 tooth shaft
458:8245定子,8牙螺杆 456:8245 rotor/8 tooth shaft

120:输入电压120VAC 60Hz Input Voltage:120VAC 60Hz
120:输入电压230VAC 50Hz Input Voltage:230VAC 50Hz

12:行程12英寸 Stroke length: 12inch
18:行程18英寸 Stroke length: 18inch
24:行程24英寸 Stroke length: 24inch
36:行程36英寸 Stroke length: 36inch
48:行程48英寸 Stroke length: 48inch

BL: 带限位开关 BL:with limit switch

C1:出线为快速螺丝接头方式样 C1: screwed nipple

B0:外管固定方式为握把(可转向) B0: with grip
BA:外管固定方式为固定座 BA:with Fixture

p:电位器(POT SENSOR) P:with POT